

Sangoma Enterprise SBC Medium to Large Business SBC



Enterprise SBCs (eSBC) sit at the edge of your company's network and do the heavy lifting for VoIP phone calls that your firewall isn't designed to do. Hide important voice network information, protect your company network from malicious attacks—that can cause your telephone bill to skyrocket or become susceptible for hackers to breach your system and take down the network. Sangoma session border controllers offer affordable protection for small businesses that most integrators can configure and provision easily.

High Availability


Ensure business continuity with our High availability (HA) feature, allowing mirroring of your main SBC with a standby SBC ready to automatically take over calls in case of failure. This feature is included free of charge!

Protection from Enterprise Security Threats

- **Denial of Services** - Call / registration overload | Malformed messages (fuzzing)
- **Configuration Errors** - Mis-configured devices | Operator and application errors
- **Theft of Service / Fraud** - Unauthorized users | Unauthorized media types
- **BYOD** - Smartphones running unauthorized apps | Viruses and malware attacking your VoIP network

Use Cases

- **Service Provider Applications** -
 - SIP trunking
 - Remote worker
 - Hosted PBX
 - Core session router and load balancer

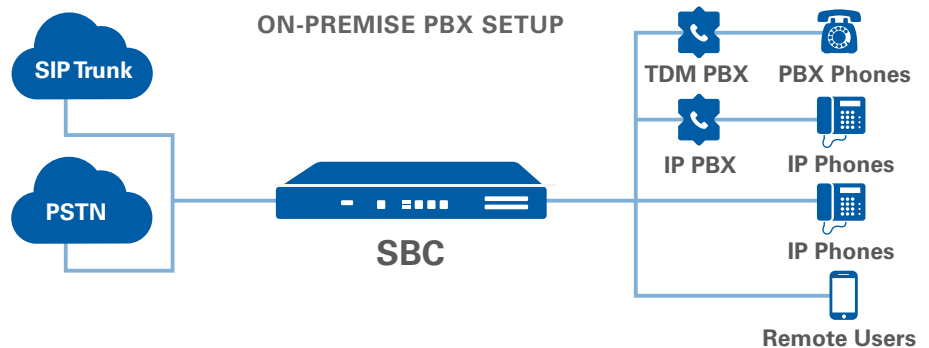

- ✓ Supports 25 - 250 Simultaneous Calls
- ✓ Field Upgradeable Session Expansion
- ✓ All-in-one Appliance for SIP & TDM Connections
- ✓ Cost-effective Session-based Licensing
- ✓ Enterprise Inter-site Networking & SIP Trunking
- ✓ Local Security Management for SMBs & Small Enterprises
- ✓ Optional Annual Support & Software Maintenance Plans

Technical Specifications

Capacities

- Max. 250 calls / sessions
- Max. 120 TDM-SIP calls / sessions
- Full transcoding capability
- Full security (SRTP / TLS) capability
- Unlimited SIP trunks

Media Capabilities

- Voice, Video, FAX, IM and Presence support
- Full RTP transcoding (G.711, G.722, G.729, G.726, G.723.1, iLBC, AMR, G.722.1)
**Only with hardware transcoding option*
- T.38 Fax Relay **Only with hardware transcoding option*

Networking

- 3x 10/100/1000 BaseT Ethernet ports
- IPV4, IPV6
- VLAN support
- 1x console port
- 1x VGA port

Licensing

- Only max. number of calls are licensed
- Field upgradeable in 25/50/150 call increments

Security

- DDoS / DoS attack protection
- Call security with TLS / SRTP
- Media security with SRTP
- IPSec encryption
- IP firewall with port forwarding
- Two-stage authentication

High Availability / Redundancy

- 1:1 active / standby two-box redundancy for business continuity

Call Control

- Advanced XML routing engine
- Least cost routing
- Rate limiting: Call and registration
- Endpoint authentication
- Media bandwidth policy
- Intelligent media anchoring / release

VoIP

- SIP 2.0 compliant
- SIP trunking and remote working
- SIP intrusion prevention
- SIP registration scan attack detection
- SIP request rate limiting
- SIP registration pass-thru
- SIP header normalization
- SIP malformed packet protection
- Advanced NAT traversal capabilities
- Topology hiding
- ENUM routing

Session and Monitoring

- Multiple session routing options
- RTCP statistics reports
- QoS (ToS or DSCP)
- RADIUS CDR and authentication
- QoS monitoring and reporting

Debugging

- Dedicated Browser interface for capturing full RTP media and signaling information
- Onboard browser-based PCAP tracing, signaling and media – wireshark compatible
- Large onboard storage capacity for long term tracing

Management

- Easy to use web interface
- HTTP XML-based CDR
- Real-time monitoring and debugging
- TR-069 for remote provisioning
- REST based interface to remotely configure SBCs

Telephony Interface

- Up to 4 E1/T1s (with A101DE/A102DE/A104DE card)
- Echo cancellation up to 128ms tail
- Primary rate ISDN, configurable NT/TE
- T1: Q.931, NI2, 4ESS, 5ESS, DMS-100
- E1: Q.931, ETSI

Hardware Specifications

- Power: 60W universal internal power supply
- Dimensions: 430mm (W) x 305mm (D) x 45mm (H)
- Weight: 7.25kgs (16lbs)
- Mounting clips included